




JTM-1050EVS2/230 Mill With Acu-Rite 203 DRO With X, Y and Z-Axis Powerfeeds and Air Powered Drawbar

Product Images

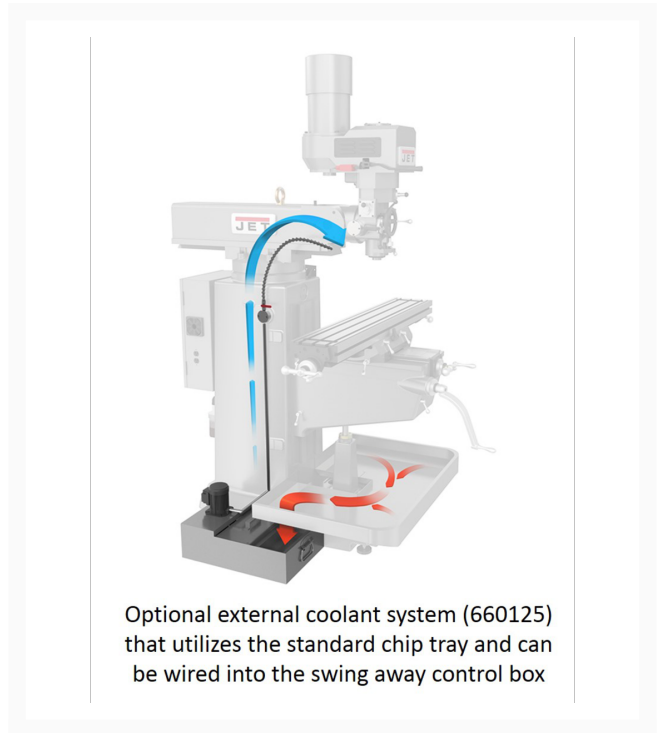

Short Description

JTM-1050EVS2/230 Mill With Acu-Rite 203 DRO With X, Y and Z-Axis Powerfeeds and Air Powered Drawbar

Additional Information

| | |
|--|------------------------------|
| Stock Number | JT9-690650 |
| Collet Capacity | 1/8 - 7/8 |
| Column Width (In.) | 20 |
| Distance Spindle to Column (Max.) (In.) | 26-3/4 |
| Inverter Type | Delta, B |
| Max Distance Spindle to Table (In.) | 20-3/4 |
| Model Number | JTM-1050EVS2/230 |
| Motor (HP) | 3 HP, 230V, 3Ph |
| Number of Axis | 2 |
| Overall Dimensions (L x W x H) (In.) | 66 x 63 x 87 |
| Power Draw Bar | Pneumatic |
| Powerfeed | X, Y and Z-Axis |
| Prop 65 | Cancer and Reproductive Harm |
| Quill Diameter (In.) | 3-3/8 |
| Quill Down Feed Rates (IPR) | .0015 - .003 - .006 |
| Range of Spindle Speeds (RPM) | 60 - 4,500 |
| Saddle Width (In.) | 11-1/2 |
| Spindle Taper (In. x TPI) | R-8 |
| Spindle Travel (In.) | 5 |
| Style (Type) | EVS |
| T-Slot Centers (In.) | 2-1/2 |
| Table Cross Travel (In.) | 14-3/4 |
| Table Longitudinal Travel (In.) | 35-1/3 |
| Table Longitudinal Travel With Powerfeed (In.) | 29-7/8 |

| | |
|-----------------------------------|---------|
| Table Size (L x W) (In.) | 10 x 50 |
| Travel of Knee (In.) | 16-1/8 |
| Travel of Ram (In.) | 15-7/8 |
| Weight (Lbs.) | 2860 |
| Work Table Weight Capacity (Lbs.) | 840 |

