

PRO 2W LED PUCK



- 2 Watts, 12 Volts, Bulb life: 25,000 hours
- Size: 2-1/4" Diameter Bore Hole 1/2" Height
- 53° Beam Spread, 1 year warranty

- **Required Component: Power Supply** - If you are **NOT** dimming from wall dimmer **-OR-**
- **Required Component: Dimmable Driver** - If you are dimming from a wall dimmer



A- Nickel Finish
B- Black Shown in photo


Packed & Sold In: Each

	PART #	QUICK CODE	DESCRIPTIONS
A	PROPK2W-3NI	R101	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Warm White (3K), Nickel Finish
	PROPK2W-5NI	R102	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Cool White (5K), Nickel Finish
B	PROPK2W-3BL	R103	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Warm White (3K), Black Finish
	PROPK2W-5BL	R104	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Cool White (5K), Black Finish

REQUIRED COMPONENT FOR STANDARD DRIVERS / POWER SUPPLY:

If you are **NOT** dimming from a wall dimmer

	PART #	QUICK CODE	DESCRIPTIONS
C	PROPRO-15ELT	R146	15W, 12V Power Supply w/6 AMP Ports
	PROPRO-30ELT	R147	30W, 12V Power Supply w/6 AMP Ports
	PROPRO-60ELT	R148	60W, 12V Power Supply w/6 AMP Ports
12V DIMMER SWITCHES & ON/OFF SWITCHES (Used with Power supply)			
D	PROSQRTD-NI	R151	60W, Sq. Touch Dimmer w/96" Input - 6" Output Wires
	PRORNDTD-NI	R152	60W, Round Touch Dimmer w/79" Input - 6" Output Wires
E	PRORNDPS-NI	R153	60W, Round Proximity Switch w/79" Input - 6" Output Wires
	PRORNDSS-NI	R154	60W, Round Door Sensor w/79" Input - 6" Output Wires
F	PROROTDIM-BL	R156	48W, Rotary Dimmer w/79" Input - 8" Output Wires
G	PRORNDON-BL	R155	60W, Round On/Off Switch w/79" Input - 6" Output Wires

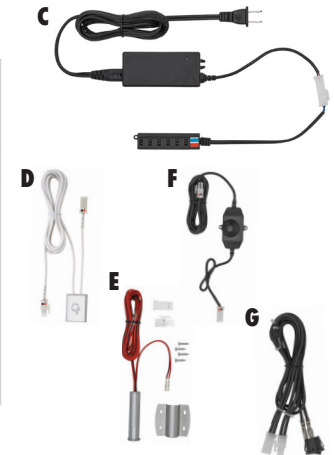


-OR-

REQUIRED COMPONENTS FOR WALL DIMMING: MUST PURCHASE DIMMER DRIVER W/ DIMMER SWITCHES

Dimmable Driver - If you are dimming from a wall dimmer - sold separately (J&K or J&L)

	PART #	QUICK CODE	DESCRIPTIONS	TAPE CAPACITY
REQUIRED COMPONENT - USE TO DIM LED TAPE WITH WALL DIMMER. HARDWIRE DIRECT TO WALL DIMMER SWITCH				
H	PROPRO-12ELTDIM	R149	12W, 12V Dim Driver w/6 AMP Ports	6'
	PROPRO-24ELTDIM	R150	24W, 12V Dim Driver w/6 AMP Ports	12'
LED WALL DIMMER USED WITH DIMMABLE DRIVERS				
I	RVDVCL-153PH-WH	T321	150W, Lutron Diva® C•L™ Dimmer w/out plate	
J	RVCTCL-153P-WH	T320	150W, Lutron Skylark Contour C•L™ Dim w/out plate	

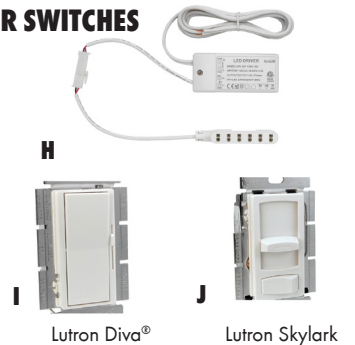

LED ACCESSORIES

LINKING WIRES • LINKS TWO TAPES TOGETHER

	PART #	QUICK CODE	DESCRIPTION
K	PROPTCON-2IN	R139	2" Linking Wire
	PROPTCON-6IN	R140	6" Linking Wire
	PROPTCON-10IN	R141	10" Linking Wire
	PROPTCON-24IN	R142	24" Linking Wire
	PROPTCON-48IN	R143	48" Linking Wire
	PROPTCON-72IN	R144	72" Linking Wire

EXTENSION CORDS

	PART #	QUICK CODE	DESCRIPTION
L	PROEXTCON-3IN	R157	3" Extension Cord
	PROEXTCON-6IN	R158	6" Extension Cord
	PROEXTCON-10IN	R159	10" Extension Cord
	PROEXTCON-24IN	R160	24" Extension Cord
	PROEXTCON-48IN	R161	48" Extension Cord
	PROEXTCON-72IN	R162	72" Extension Cord
	PROEXTCON-96IN	R163	96" Extension Cord

SURFACE MOUNT RING

	PART #	QUICK CODE	DESCRIPTIONS
M	PROPKSMR-NI	R110	Nickel Finish
	PROPKSMR-BL	R109	Black Finish

EXTRA MOUNTING BLOCK

	PART #	QUICK CODE	DESCRIPTION
N	RVTRANS-MNT-BL	T179	6 Snap Mounting Block

