

HH510
TO STANDARD



**BUREAU
VERITAS**

CONSUMER PRODUCTS SERVICES DIVISION

B. WALTER & CO

Technical Report: (5123)144-0025
Date Received: MAY 24, 2023

JUNE 8, 2023
Page 1 of 3

SCOTT BUEHRER
B. WALTER & CO
655 FACTORY STREET
WABASH, IN 46992
UNITED STATES

Sample Description:	FURNITURE TIPOVER RESTRAINT	Sample Size:	7
Vendor:	N/A	Style No(s):	N/A
Manufacturer:	B. WALTER & CO.	SKN/SKU No.:	HH510
Buyer:	N/A	PO No.:	N/A
Labeled Age Grade:	N/A	Ref #:	N/A
Appropriate Age Grade:	N/A	Country of Origin:	N/A
Client Specified Age Grade:	N/A	Assortment No.:	N/A
Tested Age Grade:	N/A		
UPC Code:	N/A		

EXECUTIVE SUMMARY:

The sample(s) MEET the following requirement(s):

- The performance test method of ASTM F3096-23, "Standard Performance Specification for Tipover Restraint(s) Used with Clothing Storage Unit(s)," Section 4.
 - See Result(s)

BVCPS Buffalo Contact Information for this Report:

Administrative Questions: Kellie Davis Phone: 716-505-3478 kellie.davis@bureauveritas.com

Technical Questions: Michael K. Trometer, Jr. Phone: 716-505-3684 mike.trometer@bureauveritas.com

Bureau Veritas
Consumer Products Services, Inc.

Michael K. Trometer, Jr.
Engineering Group Leader,
Toy and Juvenile Products Department

/DS

RESULTS:

Bureau Veritas Consumer Products Services, Inc.
100 Northpointe Parkway
Buffalo, New York 14228
Telephone: (716) 505-3300 Fax: (716) 505-3301
website: www.bureauveritas.com/cps

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



ASTM F3096-23, Standard Performance Specification for Tipover Restraint(s) Used with Clothing Storage Units

Section	Requirement	Result
	Performance Requirement	
4.	Test Method:	M See Table(s)
4.1	Assemble tipover restraint components including provided fasteners in accordance with manufacturer's instructions.	
4.2	Rigidly suspend the assembly by securing one end of the tipover restraint by gripping directly, or attaching to a fixed structure (for example, wooden block).	
4.3	Attach a loading device to the fastener(s) on the opposite end of restraint.	
4.4	Gradually, over a period of not less than 2 s nor greater than 15 s, apply the static load of 60 lb (27.22 kg) and maintain for an additional 30 s.	
4.5	If the fastener(s) become unattached from the test structure (wood block or fixed structure) in such a way that it prohibits the completion of the test, then the fastener(s) are to be reattached using whatever means possible without affecting the test results of the assembly.	


M = MEETS NM = DOES NOT MEET NA = NOT APPLICABLE NT = NOT TESTED

Table 1: Tip Restraints [ASTM F3096-23]:

	Result(s) [F3096, 60 lb load applied]
Sample 1	No release
Sample 2	No release
Sample 3	No release
Sample 4	No release



EXHIBIT # 1

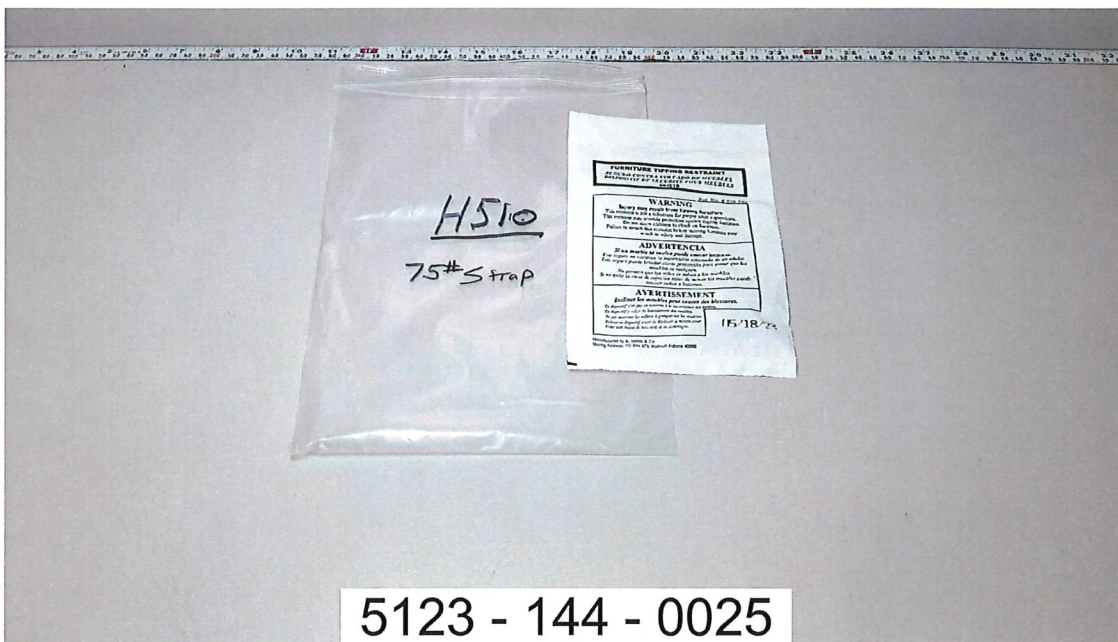

SAMPLE PHOTO